



LPG


ALUMINUM FORKLIFT



SPECIFICATIONS

MODEL/SIZE (LBS.)	20	33.5	43.5
HEIGHT (IN.)	20.3	28	34.1
HEIGHT (MM)	516	711	866
LPG CAPACITY (GAL)	4.7	7.9	10.3
LPG CAPACITY (LITER)	17.8	29.9	39
WATER CAPACITY (LBS.)	47.6	80	103.6
WATER CAPACITY (KG)	21.6	36.3	47
NOMINAL TARE WEIGHT (LBS.)	19.3	22.9	27
NOMINAL TARE WEIGHT (KG)	8.8	10.4	12.2
CYLINDER DIAMETER (IN.)	12.3	12.3	12.3
CYLINDER DIAMETER (MM)	312	312	312
CYLINDER VOLUME (CU. IN.)	1,318	2,214	2,868
CYLINDER VOLUME (LITER)	21.6	36.3	47
COLLAR DIAMETER (IN.)	10.8	10.8	10.8
COLLAR DIAMETER (MM)	274	274	274
COLLAR HEIGHT (IN.)	6.8	6.8	6.8
COLLAR HEIGHT (MM)	173	173	173
FOOTRING DIAMETER (IN.)	9.4	9.4	9.4
FOOTRING DIAMETER (MM)	238	238	238
STANDARD SPECIFICATION	DOT-4E-240	DOT-4E-240	DOT-4E-240

All dimensions are approximate.

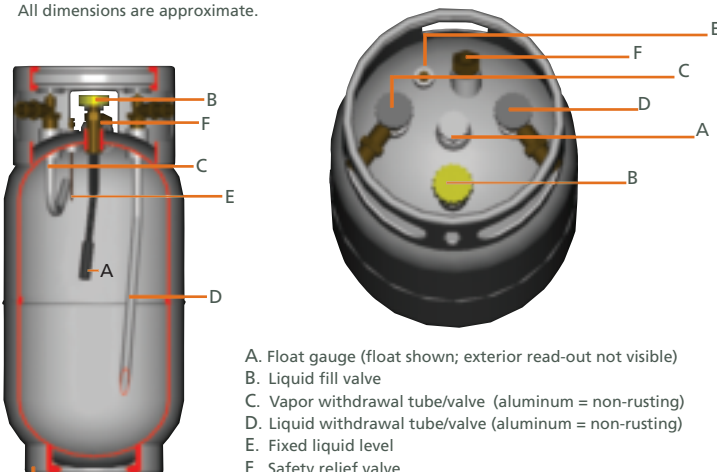

Deep, heavy-duty footing provides the largest clearance in the industry.